


Equotip 3- Portable Metal Hardness Tester



- Large, easy to read display with backlight
- Highly accurate ± 4 HL
- Automatic correction for impact direction
- Converts to all common hardness scales (HV, HB, HRA, HRB, HS, Rm)
- Light weight and easy to use
- Fast testing for a wide range of applications
- Large memory with on-screen review of data
- Download to PC or print directly via USB, Ethernet, or RS-232
- User profiles for fast change of all settings
- Rugged sealed membrane keypad
- Internal rechargeable batteries or standard "C" cells
- Custom conversions for uncommon alloys

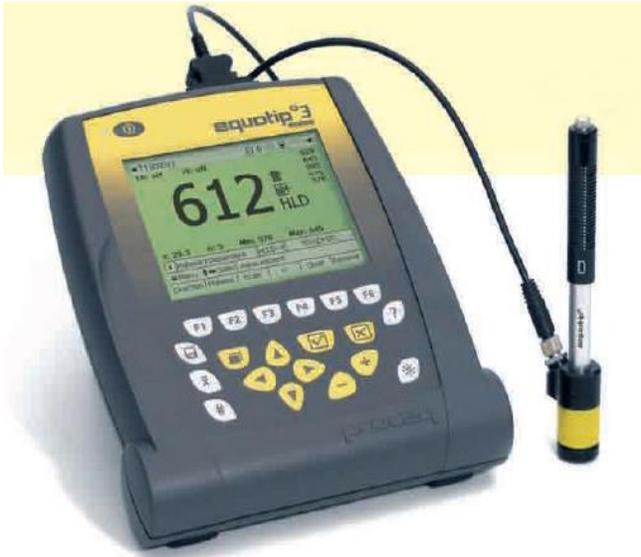


Application Range

- Good for all metals
- Ideal for production level testing
- Best suited for on-site testing of heavy, big or already installed parts
- Handy for difficult to access or confined test locations
- Automatic compensation for impact direction
- Excellent for material selection and acceptance tests
- Easy to use and accurate on curved test surfaces ($R > 10$ mm)

The EQUOTIP measuring principle

The EQUOTIP measuring principle is physically a rather simple, dynamic hardness test. An impact body with a hard metal test tip is propelled by spring force against the surface of the test piece. Surface deformation takes place when the impact body hits the test surface, which will result in loss of kinetic energy. This energy loss is calculated by velocity measurements when the impact body is at a precise distance from the surface for both the impact and rebound phase of the test.

The permanent magnet in the impact body generates an induction voltage in the single coil of the impact device. The voltage of the signal is proportional to the velocity of the impact body, and signal processing by the electronics provides the hardness reading for display and storage.

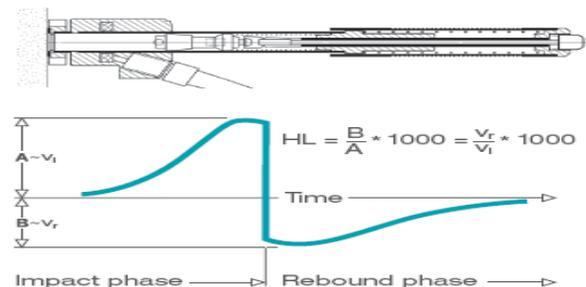

Performing the Hardness Test

Easy to use – simple operating elements allow for accurate measurements even by occasional users.

1. Load- Simply load the impact device by sliding the loading the tube forward.



2. Place- Then place and hold the impact device on the surface of the test piece at the desired test point.



3. Measure Trigger the impact by pressing on the trigger button. The hardness value will be instantaneously displayed.



Display of all information on a large clear display.



Modern electronics with power saving features provide for long operating life. The large LCD display always shows how the EQUOTIP is configured to test. Variable function keys allow for quick change of common test parameters, and the on screen hint line shows the other active control keys. The context sensitive help files give the operator quick access to the operating instructions with the press of a single button.

No subjective measuring errors are possible, giving highly repeatable results. Internal self diagnostics with error messages assure reliable test results. Readings can be stored automatically in the internal memory or sent directly to a printer. PC evaluation software allows for data analysis.

Technical Information

DISPLAY UNIT

DIMENSIONS: 170 x 200 x 45 mm (6.7 x 7.9 x 1.8 inches)

WEIGHT: 780 g plus approx. 120 g battery pack

UNIT MATERIAL: Shock resistant ABS plastic

UNIT DISPLAY: large, QVGA LCD with adjustable contrast and backlight

RESOLUTION: 1 HL; 1 HV; 1 HB; 0.1 HRC; 0.1 HRB; 1 HS; 1 N/mm²; Rm

INTERNAL DATA STORAGE: ~ 100'000 measured values

BATTERY TYPE: rechargeable Li-Ion (pn 35300029), or 3 standard size "C" cells



Perth
West Perth
0408 034 668

Brisbane
Toowong
0419 477 715

www.pcte.com.au

Melbourne
Niddrie
0428 315 502

Sydney
Belrose
0418 381 709

OPERATING TEMPERATURE: 0 to +50°C (32 to 122°F)
STORAGE TEMPERATURE: -10 to +60°C (14 to 140°F)
HUMIDITY: 90 % max.
INPUT-SOCKETS IMPACT DEVICES: 20-pole
COMMUNICATION: Ethernet, USB & RS 232. Bi-directional with PC
APPLICATION PROGRAM: EQUOLINK 3
ACCURACY: ± 4 HL



PAPWORTHS CONSTRUCTION TESTING EQUIPMENT

Perth
West Perth
0408 034 668

Brisbane
Toowong
0419 477 715

www.pcte.com.au

Melbourne
Niddrie
0428 315 502

Sydney
Belrose
0418 381 709

Impact devices



Impact device D
Part No 353 00 100

EQUOTIP® 3 basic impact device D with impact body, support rings, cleaning brush, cable (4-pole)

Application
For the majority of your hardness testing requirements.
Probe weight 75g



Impact device G
Part No 353 00 300

EQUOTIP® 3 basic impact device G with impact body, support rings, cleaning brush, cable (4-pole)

Application
Solid components. e.g. heavy castings and forgings.
Probe weight 250g



Impact device DL
Part No 353 00 120

EQUOTIP® 3 basic impact device DL with impact body, support rings, cleaning brush, cable (4-pole)

Application
For measurements in extremely confined spaces or at the base of grooves.
Probe weight 100g



Impact device E
Part No 353 00 400

EQUOTIP® 3 basic impact device E with impact body, support rings, cleaning brush, cable (4-pole)

Application
For measurements in the extremely high hardness range (always in excess of 50 HRC/650 HV): Tool steels with high carbide content inclusions.
Probe weight 80g



Impact device S
Part No 353 00 200

EQUOTIP® 3 basic impact device S with impact body, support rings, cleaning brush, cable (4-pole)

Application
For measurements in the extremely high hardness range (always in excess of 50 HRC/650 HV): Tool steels with high carbide content inclusions.
Probe weight 80g



Impact device C
Part No 353 00 500

EQUOTIP® 3 basic impact device C with impact body, support rings, cleaning brush, cable (4-pole)

Application
Surface hardened components, coatings, thin walled or impact sensitive components (small measuring indentation).
Probe weight 75g



Impact device DC
Part No 353 00 110

EQUOTIP® 3 basic impact device DC with impact body, support rings, cleaning brush, cable (4-pole)

Application
Use in very confined spaces, e.g. in holes, cylinders or for internal measurements on assembled machines.
Probe weight 50g



Perth
West Perth
0408 034 668
Brisbane
Toowong
0419 477 715

Melbourne
Niddrie
0428 315 502
Sydney
Belrose
0418 381 709

www.pcte.com.au

EQUOTIP 3 measuring range

Fields of application			D/DC	DL	S	E	G	C
1 Steel and cast steel	Vickers Brinell Rockwell	HV	81-955	80-950	101-960	83-1211		81-1012
		HB	81-654	81-646	101-640	83-686	90-646	81-694
		HRB	38-100	37-100			48-100	
	Shore Rm N/mm ²	HRC	20-68	20-68	22-70	20-72		20-70
		HRA			61-88	61-88		
		HS	30-100	31-97	28-103	30-103		30-102
		σ 1	271-2193	271-2193	271-2193	271-2193	271-2193	271-2193
σ 2	619-1477	619-1477	619-1477	619-1477	619-1477	619-1477		
σ 3	451-846	451-846	451-846	451-846	451-846	451-846		
2 Cold work tool steel	Vickers Rockwell C	HV	80-900	80-905	104-924	82-1009		98-942
		HRC	20-67	20-67	21-68	23-70		20-67
3 Stainless steel	Vickers Brinell Rockwell	HV	85-800		119-934	87-861		
		HB	85-655		105-656	88-668		
		HRB	46-102		70-104	49-102		
		HRC	20-62		21-64	20-64		
4 Cast iron lamellar graphite GG	Brinell Vickers Rockwell	HB	90-664				92-326	
		HV	90-698					
		HRC	21-59					
5 Cast iron, nodular graphite GGG	Brinell Vickers Rockwell	HB	95-687				127-364	
		HV	96-724					
		HRC	21-61					
6 Cast aluminium alloys	Brinell Vickers Rockwell	HB	19-180	20-187	20-184	23-176	19-168	21-167
		HV	22-193	21-191	22-196	22-198		
		HRB	24-85				24-85	23-85
7 Copper/zinc-alloys (brass)	Brinell Rockwell	HB	40-173					
		HRB	13-95					
8 CuAl/CuSn-alloys (bronze)	Brinell	HB	60-290					
9 Wrought copper alloys, low alloyed	Brinell	HB	45-315					

Test piece requirements

	Impact devices D, DC DL, E, S	C	G
Preparation of the surface			
Roughness class ISO	N7	N5	N9
Max. roughness depth Rt	10 µm/400 µinch	2.5 µm/100 µinch	30 µm/1200 µinch
Centre line average CLA, AA, Ra	2 µm/80 µinch	0.4 µm/16 µinch	7 µm/275 µinch
Min. weight of samples			
of compact shape	5 kg/11 lbs	1.5 kg/3.3 lbs	15 kg/33 lbs
on solid support	2 kg/4.5 lbs	0.5 kg/1.1 lbs	5 kg/11 lbs
coupled on plate	0.05 kg/0.2 lbs	0.02 kg/0.045 lbs	0.5 kg/1.1 lbs
Min. thickness of sample			
uncoupled	25 mm/0.98 inch	15 mm/0.59 inch	70 mm/2.73 inch
coupled	3 mm/0.12 inch	1 mm/0.04 inch	10 mm/0.4 inch
surface layer thickness	0.8 mm/0.03 inch	0.2 mm/0.008 inch	

	Impact devices D, DC, DL, E, S	C	G
Indentation size on test surface			
with 300 HV, 30 HRC			
diameter	0.54 mm/0.21 inch	0.38 mm/0.015 inch	1.03 mm/0.04 inch
depth	24 µm/960 µinch	12 µm/480 µinch	53 µm/2120 µinch
with 600 HV, 55 HRC			
diameter	0.45 mm/0.017 inch	0.32 mm/0.012 inch	0.9 mm/0.035
depth	17 µm/680 µinch	8 µm/2560 µinch	41 µm/1640 µinch
with 800 HV, 63 HRC			
diameter	0.35 mm/0.013	0.30 mm/0.011 inch	
depth	10 µm/400 µinch	7 µm/280 µinch	



Perth
West Perth
0408 034 668

Brisbane
Toowong
0419 477 715

Melbourne
Niddrie
0428 315 502

Sydney
Belrose
0418 381 709

www.pcte.com.au

Test Blocks

EQUOTIP® Test Blocks with MPA-Certificate

Test Blocks D/MPA, G/MPA, E/MPA and S/MPA are calibrated in accordance with the dynamic hardness value L by Proceq SA and to the static hardness value of Rockwell (HRC) or Brinell (HB) by an independent traceable laboratory. These test blocks are supplied with 2 separate certificates - a certificate to the EQUOTIP-L-value (Proceq SA) and a certificate to Brinell or Rockwell C (MPA). Type, identification, reference values etc. are engraved on the test blocks see examples below.

Test Block	Impact device calibrated with	Also suitable for use with	Other scales on test block
D MPA calibrated ca. 765 LD / 55 HRC Part no. 350 01 139	D/ DC	DL C E S	HRC
G MPA calibrated ca. 572 LG / 340 HB Part No. 350 08 009	G	D	HBW 5/750 (F=30D ²)
E Only available as MPA calibrated ca. 813 LE / 64 HRC Part No. 350 01 135	E	Not applicable	HRC
S Only available as MPA calibrated ca. 876 LS / 64 HRC Part. No. 350 01 125	S	Not applicable	HRC



EQUOTIP® Test Blocks calibrated by Proceq

Test Block	Impact device calibrated with	Also suitable for use with	Other scales marked on test block
D Proceq calibrated ca. 765 LD / 55 HRC Part No. 350 01 140	D/ DC	DL C E S	HRC
G Proceq calibrated ca. 572 LG / 340 HB Part No. 350 08 008	G	D	HBW 5/750 (F=30D ²)



Ordering Information

UNITS

353 10 100 EQUOTIP 3 Hardness Tester, unit D

Includes EQUOTIP 3 indicating device, AC adapter, EQUOTIP 3 impact device D with cable, test block D,

USB-cable, USB-memory stick, cleaning brush, coupling paste, carrying case, support ring D6 and D6a, operating instructions, quick reference guide, calibration certificate

353 10 300 EQUOTIP 3 Hardness Tester, unit G

Includes EQUOTIP 3 indicating device, AC adapter, EQUOTIP 3 impact device G with cable, test block G, support ring G6 and G6a, carrying case, USB-cable, USB-memory stick, cleaning brush, operating instructions, quick reference guide, calibration certificate

353 10 050 EQUOTIP 3 Hardness Tester, basic unit

Includes EQUOTIP 3 indicating device, AC adapter, carrying case, USB-cable, USB-memory stick, operating instructions and quick reference guide. The customer needs to buy the appropriate impact device and test block in addition to the EQUOTIP 3 basic unit. The Equotip 3 (Part No 353 10 050) basic unit is combined with impact devices and test blocks to create an Equotip 3 Hardness Tester unit that meets specific measuring requirements.



353 10 100 unit D